

DC

DC Fan

Cooling fan operating at 5V, 12V, 24V, and 48VDC.
Wide lineup including low power consumption fans, silent fans, and high airflow and high static pressure fans
36mm sq. to ϕ 200mm.



Counter Rotating Fan

Airflow and static pressure become higher than two conventional products of the same size connected in a series
38mm sq. to ϕ 172mm.



Reversible Flow Fan

The wind directions can be switched with these fans. Equivalent cooling performance can be obtained in both directions.
 ϕ 136mm



Splash Proof Fan

Cooling fan of IP54, IP55 and IP68 waterproof capability
40mm sq. to ϕ 172mm.



Splash Proof Centrifugal Fan

IP54 splash proof centrifugal fan
 ϕ 100mm to ϕ 175mm.



Oil Proof Fan

Cooling fan capable of operating in an oil-mist environment
40mm sq. to 120mm sq.



Long Life Fan

Cooling fan with Max. 200,000 hours of expected life
40mm sq. to ϕ 172mm.



Wide Temperature Range Fan

These fans can be used in a wide temperature range of -40°C to $+85^{\circ}\text{C}$.
40mm sq. to 120mm sq.



Centrifugal Fan

Cooling fan blows air in a centrifugal course.
It features high static pressure.
 ϕ 100mm to 270mm sq.



Blower

Cooling fan specialized for high static pressure
52mm to 160mm



AC

ACDC Fan

This fan works while internally converting AC power into DC power, providing the superior performance of a DC fan with the flexibility of AC input.
92mm sq. to 120mm sq.



AC Fan

The cooling fan operates at 100V to 230V AC.
60mm sq. to ϕ 172mm



PWM Controller

This device provides external control of the rotational speed of fans that have PWM control function.





Airflow Tester

This product is the industry's first portable measuring device that enables you to easily measure the system impedance and operating airflow of devices.




Domain Diagram

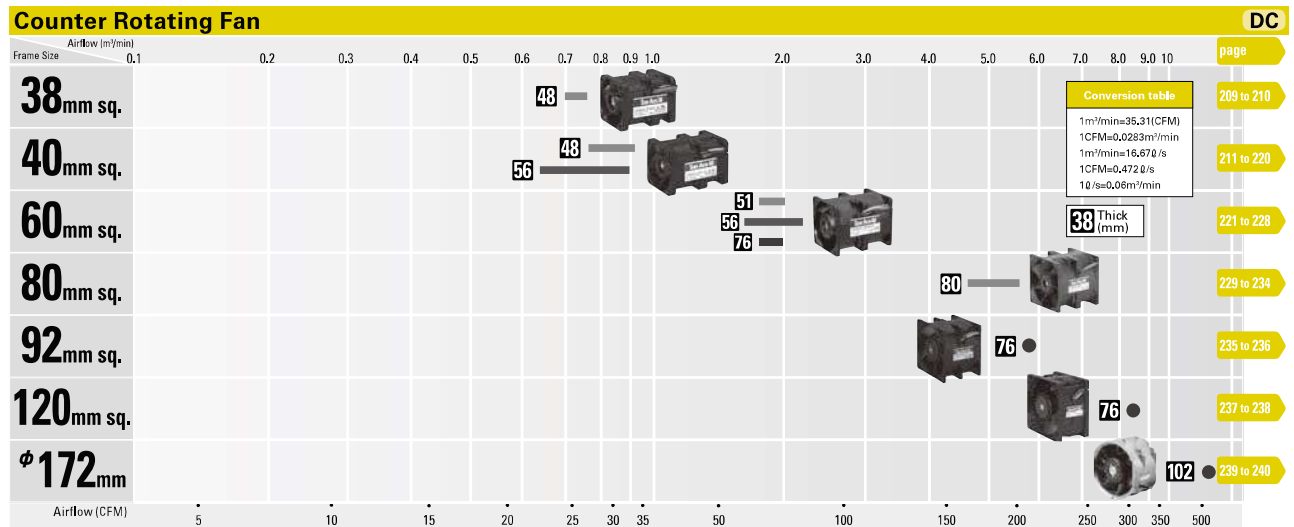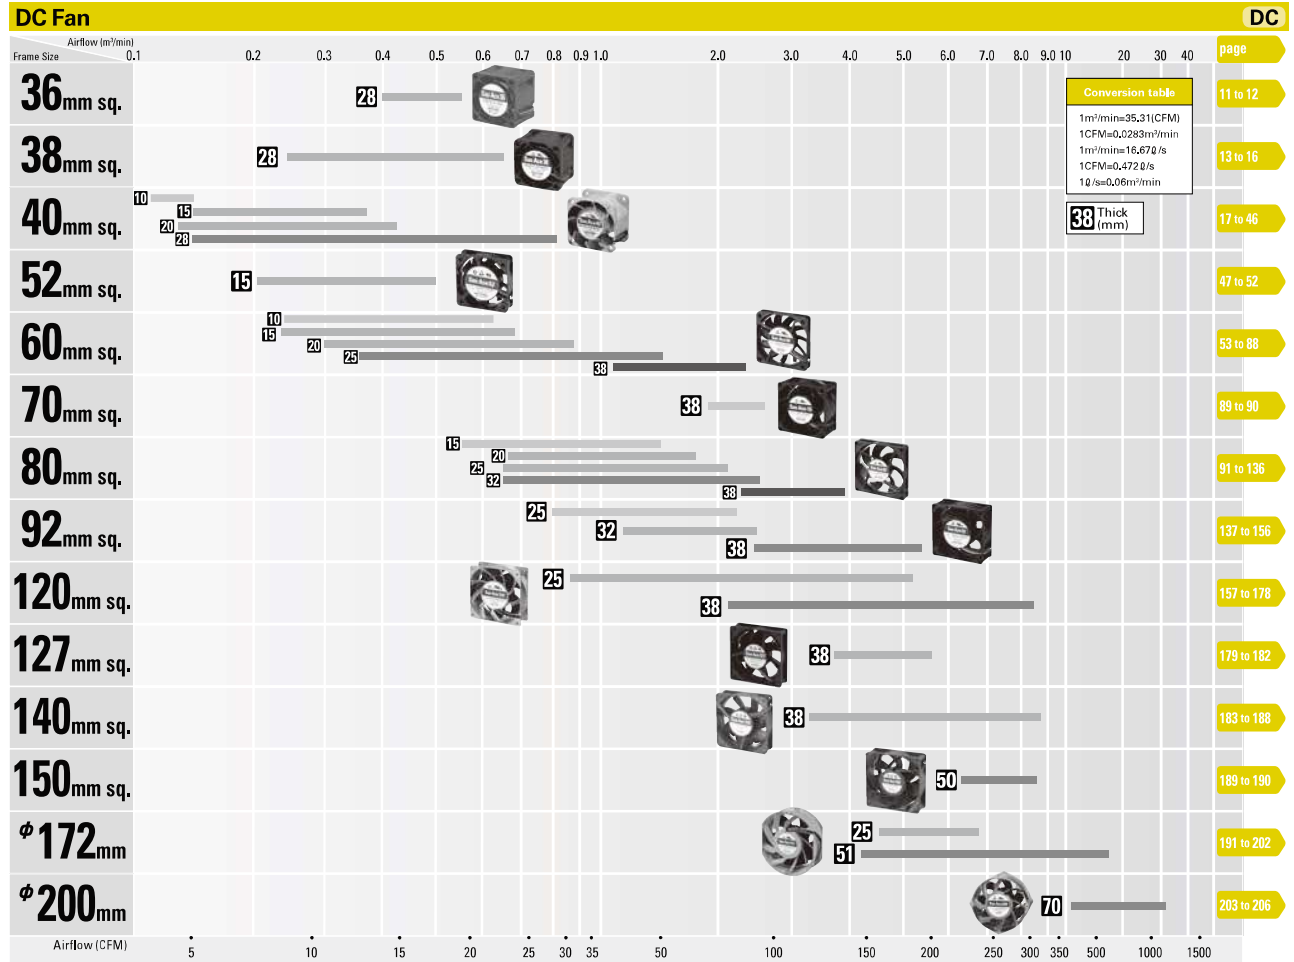


Reversible Flow Fan

DC

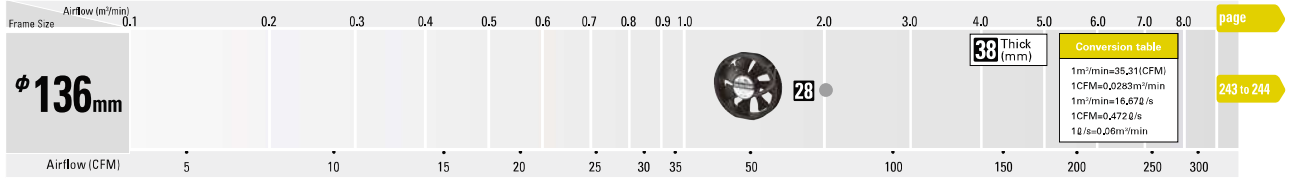


Splash Proof Fan

DC

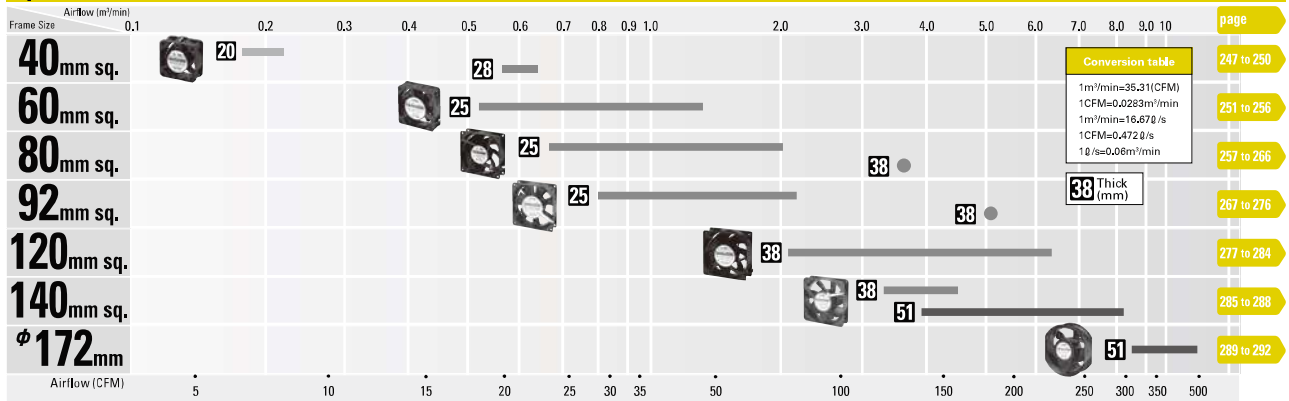


Splash Proof Centrifugal Fan

DC

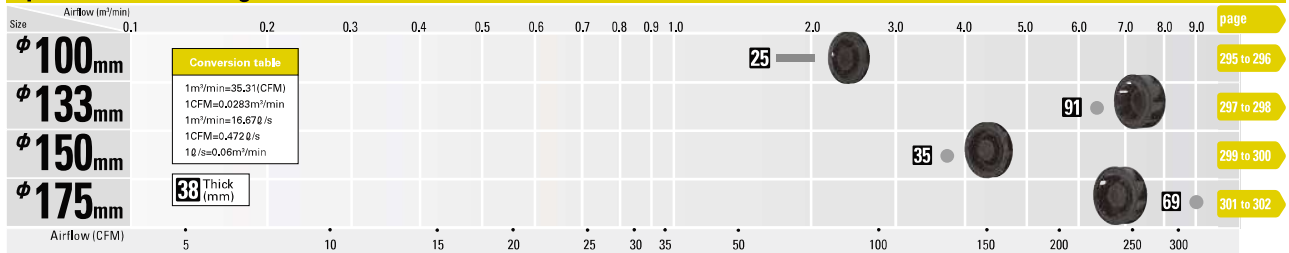

Oil Proof Fan

DC

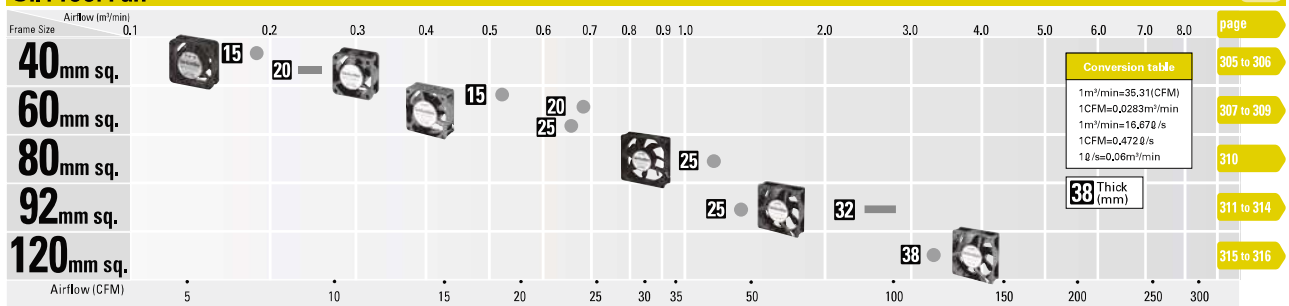

Domain Diagram

