PLUS A/B Series Drives



PLUS A and **PLUS B** are series of **ministep** bipolar chopper drives, suitable for driving two-phase stepping motors, with four, six or eight terminals.

PLUS A and **PLUS B** series drives are housed in a metallic box, 152 x 129 x 46 mm format, suitable for wall mounting.

They do not need external fans: accordingly, they are ideal both for mounting inside a metallic electrical cabinet and for stand-alone applications.

The wide range of available current/voltage values optimizes the use of **PLUS A** and **PLUS B** series drives with a wide variety of stepping motors and in a large number of applications.


R.T.A. experience, together with a thorough design both of hardware and software, has led to a product offering high reliability, premium performances, great ease of use at competitive costs.




TECHNICAL FEATURES

- Operation at 400, 800, 1600, 3200 and 500, 1000, 2000, 4000 steps/revolution.
- Electronic resonance damping circuit to ensure acoustic noise and mechanical vibrations reduction at low and medium speed.
- Wide range of operating voltages and motor phase current setting. Up to 8 possible equidistant values, between I_{NF} min. and I_{NF} max., can be set by means of DIP-SWITCH.
- Optoinsulated inputs compatible with differential control signals.
- Automatic current reduction at motor standstill.
- Possibility to switch off motor current with an external logic signal.
- Protection against short circuit at motor outputs.
- Protection against under-voltage and over-voltage.
- Overheating protection with thermal sensor.
- High efficiency CHOPPER with MOSFET final stage output.
- Operation with built-in oscillator with speed range from 14 to 450 rpm setting by means of DIP-SWITCH.
- Alarm memory by use of yellow blinking LED.

Models	V _{AC} range	V _{DC} range	I _{NF} min.	I _{NF} max.	Dimensions
	(VOLT)	(VOLT)	(AMP)	(AMP)	(mm.)
PLUS A3		39 to 85	2.4	8	152x129x46
PLUS A4		77 to 140	1.9	6	152x129x46
PLUS B3	28 to 62		2.4	8	152x129x46
PLUS B4	55 to100		1.9	6	152x129x46
PLUS B7	28 to 62		3.0	10	152x129x46

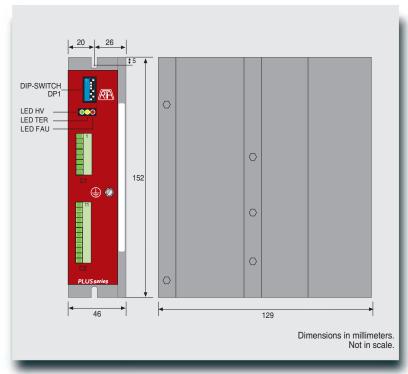

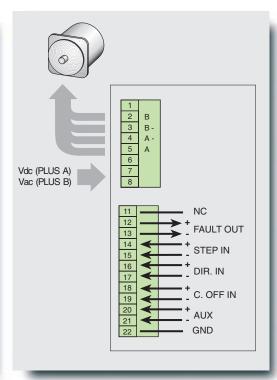



R.T.A. Deutschland GmbH Bublitzer Straße, 34 40599 DÜSSELDORF (Germany) Tel. +49.211.749.668.60 - Fax +49.211.749.668.66 www.rta-deutschland.de